Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY ATENT APPLICATION **TRANSMITTAL**

WORLD TELECOM Attorney Docket No.

First Inventor or Application Identifier Benoit BOLSEE

Frame Bundling and Payload Switching

8/11/99

or new no	onprovisional applications under 37 C.F.R. § 1.53(b))	Express Mail L	abel No.		5 m			
	PPLICATION ELEMENTS upter 600 concerning utility patent application contents	s. A	DDRESS TO:					
	ee Transmittat Form (e.g., PTO/SB/17) bmit an original and a duplicate for fee processing)	5.	Microfiche	Computer Prog	ram <i>(Appendix)</i>			
2. X Spe	ecification [Total Pages 16		ucleotide and/o		equence Submission			
1	eferred arrangement set forth below) escriptive title of the Invention	<u> </u>	· -	nputer Readab	le Copy			
- Cr	ross References to Related Applications		b. Pap	er Copy (identi	cal to computer copy)			
1	atement Regarding Fed sponsored R & D eference to Microfiche Appendix		c. Star	tement verifying	g identity of above copies			
1	ackground of the Invention		ACCOMPANYING APPLICATION PARTS					
	rief Summary of the Invention	7.			r sheet & document(s))			
	rief Description of the Drawings (if filed) etailed Description	8.	37 C.F.R.§	3.73(b) Statem	ent Power of			
	laim(s)			e is an assigne	•			
- At	ostract of the Disclosure	9.[_		insiation Docur Disclosure	ment (if applicable) Copies of IDS			
3. X Dra	twing(s) (35 U.S.C. 113) [Total Sheets 1]] [10.]		(IDS)/PTO-144				
4. Oath or D	Declaration [Total Pages 2] 11.	Preliminary	Amendment				
a. 2	Newly executed (original or copy)	12.		ceipt Postcard (specifically ite				
b . [Copy from a prior application (37 C.F.R. (for continuation/divisional with Box 16 complete	§ 1.63(d)) ^(ed) 13.	- Small En	tity State	ement filed in prior application,			
	DELETION OF INVENTOR(S)	ا"درا	X Statement	12) -12)	us still proper and desired			
	Signed statement attached deleti inventor(s) named in the prior appli			opy of Priority (oriority is claims				
GWOTE FOR I	see 37 C.F.R. §§ 1.63(d)(2) and 1. TEM\$ 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL		Other: .		******************************			
FEES, A SMAL	LL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), L D IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. §	EXCEPT			***************************************			
	NTINUING APPLICATION, check appropriate bo		requisite informat	ion below and in a	a preliminary amendment:			
	ontinuation Divisional Continuation-in	n-part (CIP)	, ,,	tion No:				
For CONTINU	olication information: Examiner		or application, fr					
), is considered a part of the disclosure of the acc ne incorporation <u>can only</u> be relied upon when a p							
	17. CORRESP	ONDENCE A	DDRESS					
Custom								
	Customer Number or Bar Code Label or Correspondence address below (Insert Customer No. or Attach bar code label here)							
Name	James C. Wray							
	1/20 21			· - · · · · · · · · · · · · · · · · · ·				
Address	1493 Chain Bridge Road							
City	Suite 300 McLean S	tate \	/A	Zip Code	22101			
Country	US Telepho	/70	3) 442–4800		(703) 448-7397			
Name (F	PrintType) James C. Wray		Registration No. (Attorney/Agent)	22,693			

Burden Hour Statement: This form's estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231, DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents,

Box Patent Application, Washington, DC 20231.

Signature

Approved for use through 9/30/70. OMB 0651-0031

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless at displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(c))—SMALL BUSINESS CONCERN	Docket Number (Optional) WORLD TELECOM
Applicant, Patentee, orldentifier: World Telecom Labs N.V.	
Application or Patent No.:	
Filedorissued: August 11, 1999	
Title: Frame Bundling and Payload Switching	
I hereby state that I am the owner of the small business concern identified below: an official of the small business concern empowered to act on behalf of the concern	dentified below:
NAMEOFSMALLBUSINESSCONCERN World Telecom Labs N.V.	
ADDRESSOF SMALL BUSINESS CONCERN Diegemstraat 42 1930 Zaventem, Belgium	
I hereby state that the above identified small business concern qualifies as a small but 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Tradem of employees of the concern, including those of its affiliates, does not exceed 500 persons. For (1) the number of employees of the business concern is the average over the previous fiscal year employed on a full-time, part-time, or temporary basis during each of the pay periods of the are affiliates of each other when either, directly or indirectly, one concern controls or has the at third party or parties controls or has the power to control both.	nark Office, in that the number or purposes of this statement, rof the concern of the persons fiscal year, and (2) concerns power to control the other, or
identified above with regard to the invention described in:	h the small business concern
the specification filed herewith with title as listed above. the application identified above. the patent identified above.	
If the rights held by the above identified small business concern are not exclusive, organization having rights in the invention must file separate statements as to their status as to the invention are held by any person, other than the inventor, who would not qualify as an 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).	small entities, and no rights
Each person, concern, or organization having any rights in the invention is listed below to such person, concern, or organization exists. a concern, or organization is listed below.	w :
Separate statements are required from each named person, concern or organization stating their status as small entitles. (37 CFR 1.27)	having rights to the invention
I acknowledge the duty to file, in this application or patent, notification of any change entitlement to small entity status prior to paying, or at the time of paying, the earliest of the it fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.	
NAME OF PERSON SIGNING Mike Walton	
TITLE OF PERSON IF OTHER THAN OWNER President	
ADDRESS OF PERSON SIGNING Diegemstraat 42, 1930 Zaventem, Belgi	um
SIGNATURE DATE	10 AUG 99

APPLICATION

FOR

UNITED STATES LETTERS PATENT

FOR

FRAME BUNDLING AND PAYLOAD SWITCHING

BY

BENOIT BOLSEE

James C. Wray, Reg. No. 22,693
Meera P. Narasimhan, Reg. No. 40,252
Marcus R. Mickney, Reg. No. P44,941
1493 Chain Bridge Road
Suite 300
McLean, Virginia 22101
Tel: (703) 442-4800

Fax: (703) 442-4800 Fax: (703) 448-7397

Frame Bundling and Payload Switching BACKGROUND OF THE INVENTION

Internet Protocol (IP) networks waste nearly 50% of the available bandwidth for IP header transmissions.

A need exists for sending digitized voice over data network with greater efficiency.

SUMMARY OF THE INVENTION

The present invention is a method and apparatus by which a digitized voice is sent between computer-based switches over a data network with greater efficiency than with existing digitized voice switching technology. The invention is especially useful for IP networks, which waste nearly 50% of the available bandwidth for IP header transmission. With the present invention, the "wasted" bandwidth for IP header transmissions may be as low as 5%.

The computer-based switch ("the switch") acts as a protocol converter/adapter for the various terminals connected to it directly or indirectly. Uncompressed calls received from the PSTN (Public Switched Telephone Network) or directly from a PABX (Private Automatic Branch eXchange) are compressed using standard compression technology, for example the G.723.1 algorithm on a DSP board. The resulting voice packets and call control information are packaged into an internal format that copes with various voice quality and PSTN/ISDN (Integrated Services Digital Network) Protocols. Compressed calls received from multi-media PC's over LAN (Local Area Network) or Internet lines are

converted into the internal format by technology that does not utilize decompression.

One aspect of the invention, "frame bundling", combines the voice packets coming from the different terminals into longer frames so that the number of frames and therefore the overhead is reduced on the data network. Frame bundling may be done only with the terminals that are connected to the same destination switch. The efficiency of this invention depends on the number of switches in the network and the amount of traffic between any pair of switches.

Another aspect of the invention, "payload switching", sets up one or more central nodes that are connected to several other switches. The central node is able to disassemble and reassemble combined frames and may be considered as a voice packet switch. The disassembled and then reassembled frames are sent back to the switches from the central node.

The internal format comprises a special packaging for the voice packets which are generated by the terminals and a communication channel between the switches to exchange call control information. The call control messages are sent directly as IP frames between the switches to let them establish IP calls and set-up the runtime switching tables; this technology is the object of another invention but will be described here to clarify the present invention.

The call control messages are generated by the switch based on the information received from the terminal which is

originating a call. This information includes at least the dialed telephone number but can also include a variety of call parameters such as the calling number, the redirecting number, the original called number, the type of call, the forward call indicators, The ISDN and SS7 standards define a large number of parameters which are transported to the destination party across the PSTN network. The switch will do the same but with IP frames.

Based on the received information, the switch determines the destination switch to which the call should be sent. To better explain the "payload switching" function of this invention, I will assume that the destination switch selected is a central node. Let's call the IP address on the switch IP1 and the IP address of the central node IP2. The switch assigns to the call a temporary internal channel number which is equivalent to a timeslot number on a TDM (Time Division Multiplexing) network, let's call it C1. The channel number C1 and all other relevant information of the call is packaged and assembled in one IP frame and sent to IP2 on a UDP port number reserved for call control messages. The central node will retrieve the message and also assign an internal channel number C2 to that call which can be different than C1. The channel number C2 will be sent back to IP1 with an acknowledgement frame which tells the switch that the call has been accepted by the central node. The central node then retrieves the call information (dialed number, ...) and determines the next switch to which the call must be sent. Again,

another channel number C3, different than C2, is assigned to this second call and another message containing the channel number and all the call information is sent to IP3, the destination switch IP address. The destination switch will also assign a channel number C4 and acknowledge the call back to IP2.

After the call is established, voice packets flow will start between the switches. Each switch involved in a call appends to each voice packet a small 4 bytes header which contains the channel number assigned by its peer so that each switch receives voice packets on channel numbers assigned by itself, hence all different. In this example, the switch uses C2 and the central node uses C1 for voice packets exchanged between them and the central node uses C4 and the destination switch uses C3 for packets exchanged between them. The central node sets-up a switching table which assigns the channel C2 to C4 and IP3 and C3 to C1 and IP1. C2 and C3 are assigned by the central node and are guaranteed to be different. This table is equivalent to a TDM switching matrix which is usually implemented in the silicon by traditional TDM switches.

When the central node receives a voice packet with a channel number C2, it looks the switching table and performs the payload switching function: the channel number in the 4 bytes header is set to C4 and the voice packet is put on the queue to IP3. The frame bundling function will assemble all packets to IP3 coming from IP1 and other switches and send the IP frame on the network.

Similarly, when a voice packet is received with a channel number C3, it is changed to C1 and put on the IP1 queue.

The call control function will include many more messages than just the call establishment message: the overlap sending, call proceeding, progress, ringing, connect, release message, and more if needed. These messages don't affect the switching function: they are simply propagated backward or forward along the switches involved in a call. This mechanism is a strict emulation of a telephony network.

Without payload switching, frame bundling would be difficult and there would be less reduction of overhead. With payload switching, switches are always sending their voice packets to the central node, which builds the frames according to the runtime switching tables.

When voice packets are combined in large frames, a small 4-byte header is added to the voice data. The 4-byte header contains the type of packet (voice, fax, silence, modem, dtmf, etc.), the length (variable packet sizes are supported) and the destination channel (for payload switching). The 4-byte header replaces the 40-byte IP header that is appended to every voice packet in the cases where there is no frame bundling.

These and further and other objects and features of the invention are apparent in the disclosure, which includes the above and ongoing written specification, with the claims and the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic diagram of the switches and the bundling into frames of voice packets from different terminals.

Figure 2 is a schematic diagram of the inputs, switches, data network and central switch for switching payloads utilizing a central node that disassembles and reassembles bundled frames from different switches.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The computer-based switch 1, shown in Figure 1, acts as a protocol converter/adapter for the various terminals 9, such as multimedia PC's 7 or telephones 8, connected to the switch 1 either directly or indirectly. Indirect connections include a PSTN or PABX 2 or a local area network, LAN, or web connection 4. Uncompressed calls 3 received from the PSTN (Public Switched Telephone Network) or directly from a PABX (Private Automatic Branch eXchange) 2 are compressed in switch 1 using a standard compression module 13, for example the G.723.1 algorithm on a digital signal processor (DSP) board. The resulting voice packets and call control information 15 are packaged into an internal format that copes with various voice quality and PSTN/ISDN (Integrated Services Digital Network) Protocols.

Compressed calls 5 received from multi-media PC's 7 over LAN (Local Area Network) or Internet lines 4 are converted and packaged with address information into the internal format 18 by bridging modules 17 without decompression.

One aspect of the invention, frame bundling, combines in combining and switching modules 19 the voice packets 15 and 18 coming from the different terminals 9 into longer frames so that the number of frames and therefore the overhead is reduced on the data network 11. Combining/switching module 19 combines the internally formatted voice packets 15 and 18 into longer frames.

The longer frames 35, in Figure 2, with the switch addresses are output from their respective switches 1 and sent over a connection line 20 to the data network 11.

Frame bundling is important, because the network load depends on the number of packets, not on the packet size. Frame bundling may be done only with the terminals 9 that are connected to the same local origination and destination switch 1. The efficiency of this invention depends on the number of switches 1 in the network and the amount of traffic between any pair of switches.

A second aspect of the invention, payload switching, then sets up one or more central nodes 21 that are connected to a plurality of other origination/destination switches 41, 51 and 61. Payload switching is the action of disassembling one or more long combined frames from the several local switches 1 and then reassembling them into one or more other long combined frames addressed to specific local switches. The central node 21 is able to disassemble and reassemble combined frames 35 and may be considered as a voice packet switch. The disassembled and then reassembled frames 37 are sent back to the switches 41, 51 and 61

from the central node 21. Figure 2 illustrates the advantage of payload switching in a large network. Particular switches 1 are indicated as switches 41, 51 and 61. Many such switches 1 are connected via the data network 11 to the central node switch 21.

In Figure 2, switch 51 has two terminals 53 and 55 that correspond to lines 3 and 5 in Figure 1. Arrows 81, 83, 85 and 87 represent intended connections between terminals 9 such as phones 8 or computers 7 that are connected to the lines 43, 45, 53, 55, 56, 63, 65, and 66. For example, arrow 81 shows an intended connection between the terminals connected to lines 63 and 45. Packets from switch 61 as shown by intended connections 81, 83 and 85 are sent to two different switches 51 and 41.

Without payload switching, frame bundling could not be used and there would be no reduction of overhead. With payload switching, the switch 61 is always sending its voice packets 64, 66, 68 to the central node 21, which builds the frames according to the runtime switching tables. These tables are set when calls are established across the network. This mechanism is similar to the establishment of a phone call across the PSTN, except that the switched units are voice packets 33 inside data frames 35, instead of timeslots inside TDM streams.

When voice packets are combined in large frames, a small 4-byte header is added to the voice data. The 4-byte header contains the type of packet (voice, fax, silence, modem, dtmf, etc.), the length of the packet (variable packet sizes are supported), and the destination channel (for payload switching).

The 4-byte header replaces the 40-byte IP header that is appended to every voice packet in the absence of frame bundling.

While the invention has been described with reference to specific embodiments, modifications and variations of the invention may be constructed without departing from the scope of the invention, which is defined in the following claims.

I claim:

1. Switch apparatus for combining digitized voice signals into large frames, comprising:

a protocol converter/adapter switch for receiving the incoming digitized voice signals and for compressing the incoming voice signals into digitized voice packets from a plurality of terminals, and for adding a header with packet type and length and channel address;

a compression module for compressing the incoming digitized voice signals into voice packets when the incoming signals are uncompressed and for packaging the compressed digitized voice packets into a format compatible with web protocols; a bridging module in the switch for packaging the incoming digitized voice signals as compressed voice packets in a format compatible with web protocols when the incoming packets are compressed and for adding a header with packet type and length and channel address; and a combining/switching module connected to the compression module and to the bridging module within the switch for combining the

2. An apparatus for sending large frames of digitized packets over a data network, comprising:

formatted digitized voice packets into longer frames.

a plurality of terminals for transmitting digitized voice signals or compressed data signals;

a switch connected to the terminals for receiving the voice signals and for acting as a protocol converter/adapter for the incoming digitized voice packets from the plurality of terminals;

lines for connecting each of the plurality of terminals to the switch;

wherein the switch further comprises a compression module for compressing the incoming voice signals into digitized voice packets when the incoming voice signals are uncompressed and for packaging the compressed digitized voice packets into a format compatible with web protocols;

wherein the switch further comprises a bridging module for packaging the incoming compressed digitized data packets into a format compatible with web protocols when the incoming packets are compressed; and

wherein the switch further comprises a combining/switching module within the switch for combining the formatted digitized voice and data packets into longer frames.

- 3. The apparatus of claim 2, wherein the lines are selected from the group consisting of PSTN lines, PABX lines, LAN lines, Internet lines, and other lines.
- 4. An apparatus for sending digitized voice over a data network, comprising:

a plurality of terminals for transmitting digitized signals, wherein the digitized signals may be compressed and uncompressed;

a plurality of switches for receiving the digitized signals and for acting as a protocol converter/adapter for the incoming signals from the plurality of terminals;

first lines for connecting the plurality of terminals to at least one of the plurality of switches;

wherein each of the plurality of switches further comprises a compression module for compressing the incoming voice signals to digitized voice packets when the incoming voice signals are uncompressed and for packaging the compressed digitized data packets in a format compatible with web protocols; wherein each of the plurality of switches further comprises a bridging module for packaging the incoming digitized data packets into a format compatible with web protocols when the incoming packets are compressed;

wherein each of the plurality of switches further comprises a combining/switching module within the switch for combining the formatted digitized voice packets into long frames;

- a data network for receiving the long frames from the plurality of switches;
- a second line for connecting the plurality of switches to the data network; and
- a central switch for receiving the longer frames from the data network and for disassembling, switching and reassembling the longer frames and for returning the reassembled frames to the data network.

- 5. The apparatus of claim 4, wherein the first lines are selected from the group consisting of PSTN lines, PABX lines, LAN lines, Internet lines, and other lines.
- 6. The apparatus of claim 4, wherein the second lines are selected from the group consisting of ethernet lines, V35 lines, G704 lines, and other lines.
- 7. The apparatus of claim 4, wherein the data network is selected from the group consisting of an Internet protocol (IP) network, a frame relay network, an X25 network, a leased line network, and other networks.
- 8. A method for combining incoming digitized voice packets into longer frames, comprising:

receiving incoming voice and data signals;
compressing the incoming voice signals to digitized data packets
when the incoming voice signals are uncompressed;
packaging the compressed digitized voice packets into a format
compatible with web protocols;

bridging the incoming data signals to digitized data packets when the incoming digitized data signals are compressed; packaging the bridged digitized data packets into a format compatible with web protocols;

combining the formatted digitized data packets into first long frames; and

transmitting the first long frames over a data network.

9. The method of claim 8, further comprising, receiving the first long frames in a central node switch; disassembling the formatted data packets from the first long frames;

assembling the disassembled data packets into second long frames; and

transmitting the second long frames to switches.

10. A method for sending digitized packets over a data network, comprising:

receiving incoming voice signals from a plurality of telephones and receiving compressed data signals from computers in a lesser plurality of switches;

compressing the incoming voice signals into digitized data packets, when the incoming voice signals are uncompressed; packaging the compressed digitized data packets into a format compatible with network protocols;

bridging the incoming digitized data signals into digitized data packets, when the incoming digitized data signals are compressed; packaging the bridged digitized data packets into a format compatible with network protocols;

combining the formatted digitized data packets into first long frames;

sending the first long frames from the plurality of switches to a data network;

sending the first long frames from the data network to a central switch;

disassembling the formatted data packets within the first long frames in the central switch:

reassembling the formatted data packets into second long frames in the central switch; and sending the reassembled frames from the central switch through the data network and the plurality of switches to the telephones and computers.

11. The method of claim 10, wherein the combining the formatted digitized data packets into the first long frames further comprises adding a 4-byte control information header to each of the digitized data packets prior to combining the digitized voice packets.

ABSTRACT OF THE DISCLOSURE

A method and apparatus by which digitized large frames of packets are sent between computer-based switches over a data network and central switch with greater efficiency than with existing digitized voice switching technology. Frame bundling combines the voice packets coming from different terminals into longer frames so that the number of frames and the overhead is reduced on the data network. Frame bundling may be done only with terminals that are connected to the same destination switch. The efficiency of this invention depends on the number of switches in the network and the amount of traffic between any pair of switches. Payload switching then sets up one or more central nodes that are connected to several other switches. central node disassembles the large frames into the packets and reassembles the packets into large combined frames. node may be a voice packet switch. The disassembled and reassembled frames are sent to the destination switches from the central node. Without payload switching, frame bundling would not be used and there would be no reduction of overhead. payload switching, switches are always sending their long frames of assembled voice packets to the central node, which builds new long frames of assembled packets according to runtime switching These tables are set when calls are established across tables. the network. This is similar to establishment of a phone call across the PSTN, except that the switched units are voice packets inside data frames, instead of timeslots inside TDM streams.

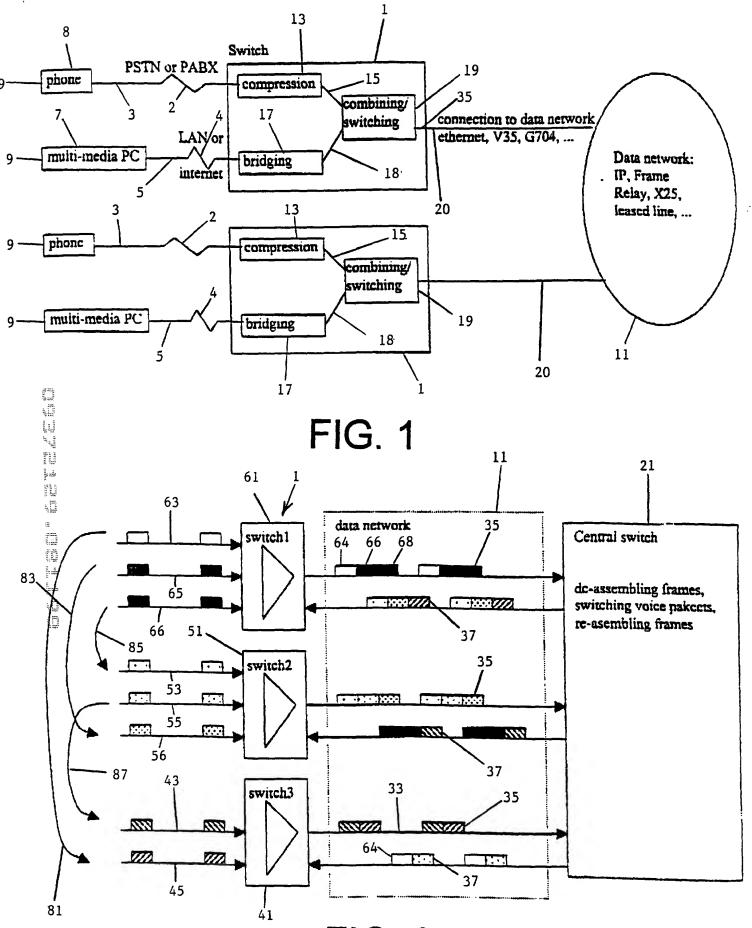


FIG. 2

Patent and Traden Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

PTO/SB/01 (12-97)	
approved for use through 9/30/00. OMB 0651-0032	
mark Office: U.S. DEPARTMENT OF COMMERCE	

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)		Attorney Docket Num	ber	WORLD TELECOM			
		First Named Inventor		BOLSEE			
		COMPLETE IF KNOWN					
		Application Number		/			
☑ Declaration Submitted with Initial Filing		Filing Date	Αυ	igust 11, 1999			
	OR	Capitilities and titlian	Group Art Unit				
	Filing (surcharge (37 CFR 1.16 (e)) required)	Examiner Name					

As a below named inventor, I hereby declare that:								
My residence, post office address, and citizenship are as stated below next to my name.								
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:								
Frame Bundling and Payload Switching								
the specification of which (Title of the Invention) is attached hereto								
	OR was filed on (MM/DD/YYYY) as United States Application Number or PCT International							
Application Number	Application Number and was amended on (MM/DD/YYYY) (if applicable).							
I hereby state that I have revamended by any amendmen	viewed and understand the c	contents of the above identi	ified specification	n, including the claims, as				
I acknowledge the duty to di			defined in 37 CF	R 1.56.				
I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.								
Prior Foreign Application Number(s)	Y '' I A I HALLING I MALANDA I							
			0000	0000				
Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:								
I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.								
Application Number	Application Number(s) Filing Date (MM/DD/YYYY)							
			numb supple	onal provisional application ers are listed on a emental priority data sheet SB/02B attached hereto.				

[Page 1 of 2]
Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

	PTO/SB/01 (12-97)
Please type a plus sign (+) inside this box -	Approved for use through 9/30/00. QMB 0651-0032
	Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no person	s are required to respond to a collection of information unless it contains
11 4 40 4 400 4 - 3 3	

PTO/SB/01 (12-97)

a valid OMB control number.

ADATION

DECL	AHA HUN -	- Utility or	ne	sign	rate	nt A	ppii	cauon	
United States of Am United States or PCT Intermation which is	enefit under 35 U.S.C. 120 terica, listed below and, in: I International application in material to patentability as PCT international filing date	sofar 25 the subject mail in the manner provided by a defined in 37 CFR 1.56	er of eac	ich of the c	laims of this	s applicat	on is not	disclosed in the prior i	
U.S. Parent Application or PCT Parent Number			•	Parent Filing Date P (MM/DD/YYYY)				Patent Number Applicable)	
								-	
Additional U.S.	or PCT international applic	ation numbers are listed (on a supp	piemeniai p	riority data	kheet PT(D/SB/028	attached hereto.	
	, i hereby appoint the follow		r(8) to p	rasecute th	s epplicatio	n and to t	ransaçt ali	business in the Paten	
ind Trademark Offic	e connected therewith:	Customer Number OR Registered practitioner(s) name	/registration	number list	ted below	M	lace Customer umber Bar Code Lahel here	
	łame	Registration Number		Name		Registration Number			
James C. Wray Meera P. Narasimhan		22,693 40,252							
Additional regist	tered practitioner(s) named	on supplemental Registe	red Prac	titioner Info	mation she	et PTO/S	B/02C att	ached herato.	
Direct all correspo	ondence to: Custo	mer Number r Code Label			7			ence address below	
Neme	James C. Wr	ay							
Address	1493 Chain	Bridge Road, S	ilte	300					
Address									
City	McLean			State	VA	ZIP	2210	1	
Country US Telephone (7			703)	03) 442-4800 Fax (703) 448-7397					
believed to be true ounishable by fine	iat all statements made he is and further that these si or impresentment, or both, latent issued thereon.	iatements were made wi	th the kr	nowiedde ti	tat Willful fo	ise state:	ments and	i the like so made are	
Name of Sole	or First inventor:			A petition	has been	filed for	this uns	igned inventor	
Given	Name (first and middle	(if anvi)			Famil	y Name	or Suma	me	
Benoit			E	Bolsee					

inventor's Teas 10/8/99 Date Signature Brussels Belgium Belgian Residence: City Country Citizenship State Rue Keyenbempt, 26 Post Office Address Post Office Address 1180 Belgium Brussels Country ZP City State supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hareto Additional inventors are being named on the